

Club Car®

CARRYALL

CARGO UTILITY VEHICLES



Things can get rocky out there. Team members come and go. Budgets fluctuate. Responsibilities expand. But the one-and-only Carryall® utility vehicle remains a constant. It keeps on working, day in and day out: hauling cargo, transporting crews, saving time and money. And now it's more reliable and versatile than ever. By combining leading-edge innovations with traditional quality, the Carryall UTV is the one utility vehicle that can tackle 1,000 jobs. It stands alone.

1,000 JOBS. ONLY ONE
CARRYALL



JOB 110: MOVING MOUNTAINS

The Carryall 550 can move mountains of dirt, rock, or anything you throw into it. With more than a half-ton vehicle rated capacity, and an optional electric bed lift, this hero demonstrates its strength daily with a Mt. Everest attitude.



TANK-LIKE
DURABILITY.
TRUCK-LIKE PERFORMANCE.

Power right through your to-do list with the Carryall, whether you're maintaining your facilities or grounds, running security, hauling cargo, staging events, simplifying housekeeping or anything else.

We're so confident in the Carryall line that we expanded the warranty. The vehicles are covered by an industry-leading 4-year battery, 3-year/3,000-hour powertrain, 2-year bumper-to-bumper limited warranty.

And a network of more than 600 Authorized Club Car Dealers deliver easy access to parts and factory-trained mechanics.





JOB 886: ALWAYS AN EARLY BIRD.

The Carryall 500 works as hard as you do. Scratch that. Harder. It's ready before you are, features a 14-hp Subaru engine with electronic fuel injection, and carries up to 1,200 lb (544 kg) of passengers and cargo. Yet it never needs a lunch break.

***DON'T JUST BUY A UTILITY VEHICLE. BUY
UNSURPASSED
RELIABILITY.***


Carryall® utility vehicles are known for delivering years of trouble-free service.

The new vehicles continue that tradition. They retain the core components users prize in the Carryall brand: the rustproof, corrosion-resistant, aircraft-grade aluminum frame and body; tough ArmorFlex™ front body with automotive finish; self-compensating rack-and-pinion steering; independent front suspension system and unparalleled reliability. But they also incorporate innovative new features and benefits that add even more value.


So you can upgrade your fleet while staying with the Carryall line you know and trust.

INDUSTRY-LEADING INNOVATIONS THAT TAKE THE WORK OUT OF WORK.


1. FUEL ECONOMY (MPG)

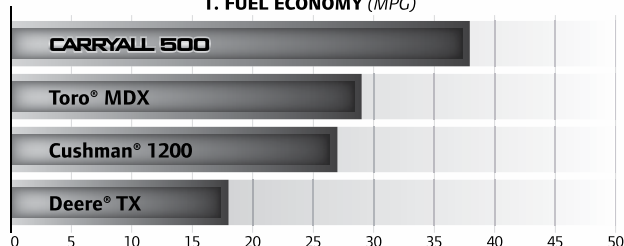

2. ANNUAL FUEL COST (\$US)

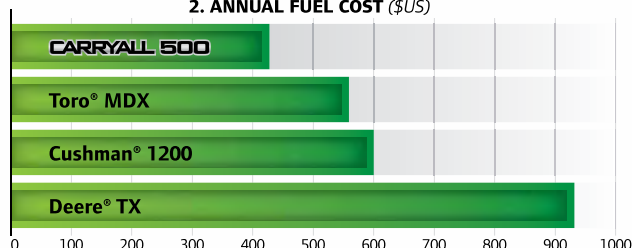

3. HILL CLIMB SPEED (MPH)

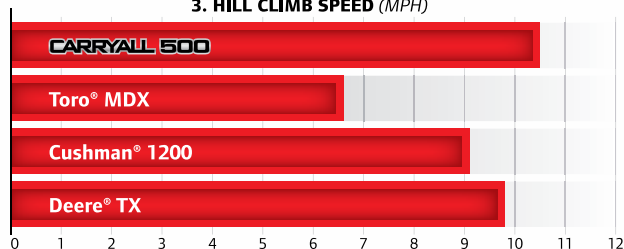

Boost Performance with an EFI Engine.

Gasoline-powered two-wheel drive Carryall® utility vehicles feature a 14-hp-rated, 404cc, Subaru single-cylinder overhead cam engine with electronic fuel injection (EFI), hemispherical heads, a case-hardened steel timing chain and a splash lubrication system that eliminates oil filters. The engines offer the following benefits over the former Carryall engines:

- Increase horsepower by 30%.
- Boost fuel efficiency by as much as 50%.
- Accelerate faster.
- Reduce emissions.
- Start right up, even in frigid weather.
- Improve reliability and longevity.
- Automatically compensate for altitude.
- Reduce maintenance cost.

Club Car is so confident in this new engine that the warranty was increased from two years/2,000 hours to three years/3,000 hours limited warranty standard.

All performance testing was performed December 2013 by independent agency ATS, Marietta, Georgia. For charts [1] and [2], vehicles were tested with driver plus cargo — 650 lb (294.8 kg) total weight — on rolling hills. Fuel cost were based on 5,000 miles per year, and fuel cost of \$3.50 per gallon. For chart [3], vehicles were tested with driver plus cargo 1200 lb (544.3 kg) on a 15-17% grade. Your results may vary.



Experience Fit-to-task Versatility and Unrivalled Ergonomics.

The Carryall utility vehicles feature an industrial-strength bed, matchless versatility and automotive interiors.

- A** An automotive-style dash and ignition key with oversized dash pockets for storage, standard 12-volt powerport, and soft-grip steering wheel.
- B** Cockpit-like interior, more space between the driver and steering wheel, and contoured seating with high back bench seat.
- C** A rugged aluminum bed box featuring a Rhino™ lined floor for durability.
- D** A configurable, removable track-based attachment system for carrying tools and equipment.
- E** Optional adjustable bed dividers and tie-downs that stabilize cargo.
- F** A single-handed latch-and-release tailgate that runs across the back of the cargo box and can be opened from either side or the center.



Improve Productivity with The Industry's Widest Range of Commercial Accessories. When designing the new Carryall® utility vehicles, we did not bolt on existing accessories. Instead we designed the vehicle and accessories to integrate with each other. These include:

- LED headlights that last 50 times longer than traditional lights.
- An optional cab integrated into the vehicle's design, so it doesn't look "bolted on." Its doors and windshield sit flush with the frame, keeping wind and rain out.
- Ladder racks, tool boxes, van boxes, stake sides, dump kits and more.
- Cabs, enclosures, heaters, fans and other equipment that can turn your vehicles into year-round assets.



Powerful Electric Drivetrains and Advanced Charging Systems. Most electric Carryall utility vehicles are powered by our potent IQ Plus electric system with 500-amp controllers. They deliver amazing low-end torque and 21 peak horsepower (15.7 kW), advanced diagnostics, customizable speed and performance control, and regenerative braking. The vehicles are also available with extended range batteries that deliver a range of 50+ miles.

Most also come standard with an industry exclusive onboard, high-efficiency charger with cord retractor. The chargers:

- Can be charged at any 110- or 240-volt outlet.
- Work globally, and continue charging even during voltage swings.
- Are 92-95% efficient, a 10% increase over the former charger.
- Are charged through a plug conveniently located on the front of the car.
- Issue an audible alert when charging begins.
- Can be programmed with algorithms for lead acid or gel/AGM batteries.





DRIVING SURFACE				
IMPROVED				ALL
VEHICLE CAPACITY				
EMPTY	1/4	1/2	3/4	1 TON
TOWING CAPACITY				
EMPTY	1/4	1/2	3/4	1 TON

CARRYALL 100

Entry-level Pricing. Full-sized Performance. The sturdy but affordable Carryall 100 is a great choice for security, parking and lighter duties. Available in gas with a class-leading EFI engine or electric with a high-efficiency charger, it fits into the back of a pick-up truck.



JOB 995: AN ECONOMICAL WAY TO RUN SECURITY.

The Carryall 100 is our most economical model. Its small profile makes it suitable for security detail in congested areas such as parking garages and its large tires help in climbing curbs or traversing rough terrain.



DRIVING SURFACE				
IMPROVED				ALL
VEHICLE CAPACITY				
EMPTY	1/4	1/2	3/4	1 TON
TOWING CAPACITY				
EMPTY	1/4	1/2	3/4	1 TON

CARRYALL 300

When Bigger is Better! Need a heavier duty vehicle? Consider the Carryall 300. Available in gas or electric, this two-wheel drive vehicle features heavy-duty rustproof aluminum body and a bed built to withstand even harsh industrial conditions.




JOB 9: WIELD THE WELDER.

(Above) The Carryall 300 has the strength and dependability of a quality, seamless weld. Consider an optional receiver hitch for towing on job sites.

JOB 228: PAINTING, SIMPLIFIED.

The Carryall 300's unique bed box features a configurable track-based attachment system with optional ladder racks and other inventive accessories. This frees room in the bed for other supplies and protects your valuable assets.

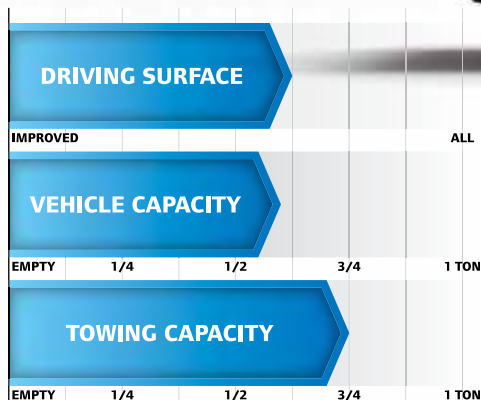

CARRYALL 500

A-Jack-Of-All-Trades. Need to carry more weight? The Carryall 500 offers a total vehicle capacity of up to 1,200 lb. (544 kg). That, and its unique fit-to-task bed box design, make it ideal for a range of duties around your site.

JOB 743: RESORT LIVING.

(Above) Resort to the Carryall 500 for the best all-around work truck. Whether working the docks or performing maintenance around the property, it will take care of all your needs.

JOB 335: GROUNDS MAVERICK.

(Right) The Carryall 500 can safely tow and haul a combined 3/4 ton load. That's enough to carry landscape materials and the tools needed to make short work of grounds maintenance.





DRIVING SURFACE				
IMPROVED				ALL
VEHICLE CAPACITY				
EMPTY	1/4	1/2	3/4	1 TON
TOWING CAPACITY				
EMPTY	1/4	1/2	3/4	1 TON

CARRYALL 550

More Ground Clearance. With all-terrain tires and increased ground clearance, this vehicle trounces rough terrain. Like all Carryall utility vehicles, it features a cockpit-like interior that makes the vehicle easy to enter and exit.



JOB 491: PUTTING OUT FIRES.

Thanks to its unmatched versatility and strength, the Carryall 550 can be used in many applications at construction and industrial sites. From down-and-dirty jobs that require heavy lifting to serving the fire brigade, it commands respect.



DRIVING SURFACE				
IMPROVED				ALL
VEHICLE CAPACITY				
EMPTY	1/4	1/2	3/4	1 TON
TOWING CAPACITY				
EMPTY	1/4	1/2	3/4	1 TON

CARRYALL 700

A Heavy Hauler. Combining a long bed with a $\frac{3}{4}$ ton (680 kg) total vehicle capacity, the Carryall 700 is your go-to vehicle for large bulky loads. Engineered with Club Car's renowned independent front suspension and rack-and-pinion steering, it reduces vibrations and delivers a smooth ride, even when fully loaded.


JOB 611: HEAVY LIFTER.

(Above) With a whopping $\frac{1}{2}$ ton capacity bed that's nearly six feet (179 cm) long, the Carryall 700 will win your fleet's Iron Man contest hands down. Its best-in-class ground clearance and turning radius let it navigate rough terrain and tight spaces with ease.

JOB 775: GROUNDS CLEARANCE.

(Right) The Carryall 700 with optional stake-side kit is a great way to add functionality. Use the flat bed to haul oversized items, or quickly attach the stake-sides to carry unsightly cargo.



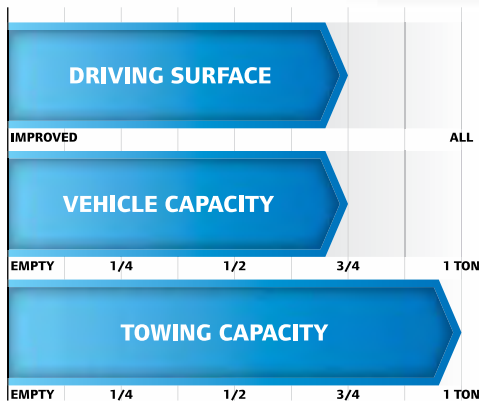

CARRYALL 1500^{2WD}

More For Less. The Carryall 1500 with two-wheel drive delivers the power and ground clearance of a four-wheel drive vehicle. It tows 2000 lb (907.2 kg), can be upgraded to a near 1-ton vehicle rated capacity and features 4-wheel disc brakes with a 20.1 hp (15.0 kW) Kawasaki gasoline engine.



JOB 939: GENTLE GIANT.


Need a heavy-duty, yet turf-friendly vehicle? Depend on the Carryall 1500 2WD. Its large turf tires tread lightly, but its optional 3/4-ton (680.4 kg) payload capacity gives it the strength to do more.



CARRYALL 1500^{4WD}

Foolproof Four-wheel Drive. The Carryall 1500 features Club Car's exclusive IntelliTrak™ all-wheel-drive system that senses the ground it's on and shifts automatically. Available with a 20.1 hp-rated (15.0 kW) Kawasaki gasoline or 20 hp-rated (15.0 kW) Kubota Diesel engine, this heavy-duty vehicle gets down and dirty.

Want more versatility? The Carryall 1500 IntelliTach™ combines the rugged Carryall 1500 with an innovative hydraulic quick-attachment tool system and three task-oriented implements.

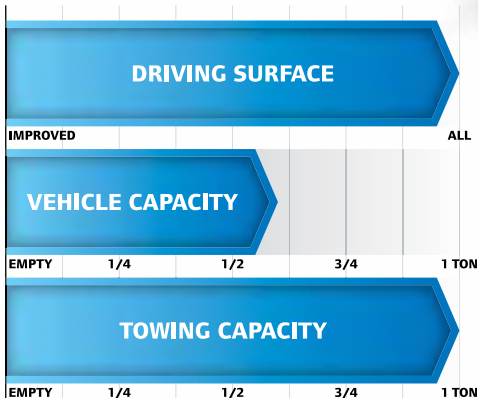

JOB 107: SERIOUS SECURITY.

With its heavy-duty chassis, 8.2 in. (20.8 cm) of rear axle clearance and a top speed of 25 mph (40.2 km/h), the Carryall 1500 with 4-wheel drive is easily seen, ideal for driving over large obstacles, and can quickly cover a lot of ground.





DRIVING SURFACE				
IMPROVED				ALL
VEHICLE CAPACITY				
EMPTY	1/4	1/2	3/4	1 TON
TOWING CAPACITY				
EMPTY	1/4	1/2	3/4	1 TON

CARRYALL 1700 4WD

A Four-passenger 4x4 With a Full-sized Bed. The Carryall 1700 builds on the features of the Carryall 1500 by adding two additional forward-facing seats without sacrificing cargo capacity. With room for four passengers and 800 lb (363 kg) of cargo, it lets your crew get the job done in one trip.



JOB 322: SAVING LIVES.

(Above) Consider the Carryall 1700 Ambulance with 4-wheel drive for unstoppable power and the space to carry all of your lifesaving gear. Engage our Custom Solutions department so you can outfit one exactly the way you want it.

JOB 751: A HELPING HAND.

(Left) You'll love the Carryall 1500 with 4-wheel drive and the Intellitach™ quick attachment system. Save time and money with an all-in-one utility vehicle, plow, forklift, and bucket loader solution.

FREE BED SPACE.
VERSATTACH™
TRIM TRAVEL TIME.

Your Vehicle, Your Way. Check out our portfolio of accessories including the all new, configurable and removable VersAttach™ track-based bed attachment system for carrying tools and equipment. The system carries tools and equipment outside the bed. This frees bed space, protects your gear and reduces round trips. And, if accessories alone won't do the trick, our Custom Solutions Department will create a unique vehicle just for your application.





Ratcheting Tool Holder Kit (Upper)
Standard Tool Holder Kit (Lower)



Backpack Blower Rack



Multi-Tool Holder Kit



Bed-Mounted Ladder Rack Kit



Bucket Holder Kit



Bed Divider Kit
Bed Sub-Divider Kit

WE GIVE YOU LOTS OF OPTIONS AND ACCESSORIES.

ACCESSORY		CARRYALL															
		100		300		500		550		700		1500	1500		1500	1700	
		ELECTRIC	GAS	ELECTRIC	GAS	ELECTRIC	GAS	ELECTRIC	GAS	ELECTRIC	GAS	2WD	4WD		Intellitach	4WD	
												GAS	GAS	DIESEL	DIESEL	GAS	DIESEL
1	Headlights	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S
2	LED Headlights	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
3	Headlights/Taillights/Horn	0	0	0,P	0,P	0,P	0,P	0,P	0,P	0,P	0,P	0	0	0	0	0	0
4	Headlights/Taillights/Horn/Turn Signals	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5	Canopy Top	0	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-
6	Canopy Top	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
7	Canopy-mounted Strobe	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
8	Post-mounted Strobe	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
9	Fold-down Windshield	0	0	0	0	0	0	0	0	0	0	-	-	-	-	-	-
10	Solid Windshield	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
11	Solid Glass Windshield with Wiper	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
12	Soft Enclosure (Gray Vinyl)	0	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-
13	Differential Guard	0	0	0,P	0,P	0,P	0,P	0,P	0,P	0,P	0,P	0	0	0	0	0	0
14	Brush Guard	0	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-
15	Heavy-Duty Brush Guard	-	-	0,P	0,P	0,P	0,P	S	S	0,P	0,P	-	-	-	-	-	-
16	Front Fender Guards	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
17	Headlight Guards	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
18	Rear Fender Guards	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
19	Heavy-duty Brush Guard	-	-	-	-	-	-	-	-	-	-	0	0	0	0	0	0
20	Single Point Watering System	0	-	0	-	0	-	0	-	0	-	-	-	-	-	-	-
21	4-digit Security Key Pad	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
22	Locking Glovebox	-	-	0,P	0,P	0,P	0,P	0,P	0,P	0,P	0,P	-	-	-	-	-	-
23	Complete Cab (ROPS ISO 3471)	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
24	Range Cab (ROPS ISO 3471)	-	-	0	0	0	0	-	-	0	0	-	-	-	-	-	-
25	Basic Cab (ROPS ISO 3471)	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
26	Falling Objects Protective Structure (ISO 3449)	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
27	Canopy Headliner	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
28	Solid Rear Window	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
29	Rear Sliding Window	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
30	Rear Window Protector	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
31	Glass Doors (Driver Window)	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
32	Deluxe Doors (Driver/Pass Window)	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
33	Framed Soft Doors	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
34	Door Hold Open Kit	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
35	Overhead Console/Fan/Light	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
36	Front Wiper	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
37	Front Windshield Washer Kit	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
38	Front LED Work Lights	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
39	Rear LED Work Lights	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
40	Cab Strobe Light	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
41	Side Mirrors	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
42	Cab Rear View Mirror	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
43	5-panel Mirror	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
44	Cab Heater	-	-	-	0	-	0	-	0	-	0	0	0	0	0	0	0
45	Van Box	-	-	-	-	0	0	-	-	0	0	-	-	-	-	-	-
46	Frame Ladder Rack	-	-	-	-	0	0	0	0	0	0	-	-	-	-	-	-
47	Nerf Bars	0	0	-	-	-	-	-	-	-	-	0	0	0	0	0	0
48	Aluminum Tool Box (Lockable)	-	-	0	0	0	0	0	0	0	0	0	0	0	0	0	0
49	Stakeside Bed	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
50	Tailgate Tether	-	-	0,P	0,P	0,P	0,P	0,P	0,P	0,P	0,P	-	-	-	-	-	-
51	Electric Bed Lift	-	-	0	0	0	0	0	0	S*	S*	0	0	0	0	0	0
52	Limited Slip Differential	-	0	-	0	-	0	-	0	-	0	-	-	-	-	-	-
53	Canopy Top	-	-	-	-	-	-	-	-	-	-	0	0	0	0	0	0
54	Solid Windshield	-	-	-	-	-	-	-	-	-	-	0	0	0	0	0	0

(S) Standard Equipment (O) Optional Equipment (P) Premium Package (-) Not Available

* 500 lb/226.8 kg max

** Not all accessories available in all markets. Check with your local Club Car representative for details and availability.

ACCESSORY		CARRYALL															
		100		300		500		550		700		1500	1500		1500	1700	
		ELECTRIC	GAS	ELECTRIC	GAS	ELECTRIC	GAS	ELECTRIC	GAS	ELECTRIC	GAS	2WD	4WD		Intellitach	4WD	
													GAS	DIESEL		GAS	DIESEL
55	Fold-down Windshield	-	-	-	-	-	-	-	-	-	-	0	0	0	0	0	0
56	4x4 Cab	-	-	-	-	-	-	-	-	-	-	0	0	0	0	-	-
57	Front Skid Plate	-	-	-	-	-	-	-	-	-	-	0	0	0	0	0	0
58	CV Boot Guards (Metal)	-	-	-	-	-	-	-	-	-	-	-	0	0	0	0	0
59	2500 lb. Winch	-	-	-	-	-	-	-	-	-	-	0	0	0	0	0	0
60	2-inch Front Receiver	-	-	-	-	-	-	-	-	-	-	0	0	0	0	0	0
61	5-Spoke Silver Wheel Covers	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
62	Premium Tires	-	-	0,P	0,P	0,P	0,P	-	-	0,P	0,P	-	-	-	-	-	-
63	Extra-traction Turf Tires	-	-	0,P	0,P	0,P	0,P	0	0	0,P	0,P	-	-	-	-	-	-
64	All-terrain Tires	S	S	-	-	-	-	S	S	-	-	0	S	S	S	S	S
65	Mud Tires	-	-	-	-	-	-	-	-	-	-	0	0	0	0	0	0
66	Alloy Wheel	-	-	-	-	-	-	-	-	-	-	0	0	0	0	0	0
67	Turf/Street Tires	-	-	-	-	-	-	-	-	-	-	S	-	-	-	-	-
68	Intellitach™ Plow Blade	-	-	-	-	-	-	-	-	-	-	-	-	-	0	-	-
69	Intellitach™ Front Bucket	-	-	-	-	-	-	-	-	-	-	-	-	-	S	-	-
70	Intellitach™ Pallet Forks	-	-	-	-	-	-	-	-	-	-	-	-	-	0	-	-
71	Bed Mat	-	-	-	-	-	-	-	-	-	-	0	0	0	0	0	0
72	Bucket Holder	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
73	Multi-tool Holder (Pair)	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
74	Tie Down (Pair)	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
75	Ratcheting Tool Holder (Pair)	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
76	Leaf Blower Holder	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
77	Ladder Rack (Pair)	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
78	Poly Tool Box	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
79	Flex Grip Tool Holder (Pair)	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
80	Bed Divider	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
81	Bed Subdivider (Divider Prerequisite)	-	-	0	0	0	0	0	0	0	0	-	-	-	-	-	-
82	Standard Body Colors	S	S	S	S	S	S	S	S	S	S	Grey/Green	Grey/Green	Grey/Green	Grey/Green	Grey/Green	Grey/Green
83	Premium Body Colors	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Campus Package Includes:

- Any standard body color, grey seats, taillights, brake lights, turn signal and horn, any color canopy, folding windshield, lockable glove box, rear receiver hitch, heavy-duty front brushguard
- Cargo box with tailgate tethers (Carryall 300, 500, and 550)
- Flat bed with stake-side kit (Carryall 700)
- Limited slip differential upgrade (Carryall 550)
- Extended range batteries and single-point watering system (electric models)

Commercial Package Includes:

- Any standard body color, grey seats, taillights, brake lights and horn
- Cargo box with tailgate tethers (Carryall 300, 500, and 550)
- Flat bed (Carryall 700)
- Heavy-duty trailer hitch (Carryall 300 and 550)
- Heavy-duty brushguard (Carryall 550 and 700)

Superintendent Package Includes:

- Any standard body color, grey seats, any color canopy, cargo box with tailgate tethers, lockable glove box, differential guard, heavy-duty front brushguard, heavy-duty trailer hitch, extra-traction rear tires and wheel covers
- Extended range batteries and single-point watering system (electric models)











VersAttach™ Facility Maintenance Package Includes:


- On any Carryall 500, 550 and 700 utility vehicle, a
- Poly-tool box
- Ladder rack (pair)
- Bucket holder

VersAttach™ Grounds Package Includes:

- On any Carryall 500, 550 and 700 utility vehicle, a
- Flex grip tool holder (pair)
- Multi-tool holder (pair)
- Ratcheting grip tool holder (pair)
- Leaf blower holder





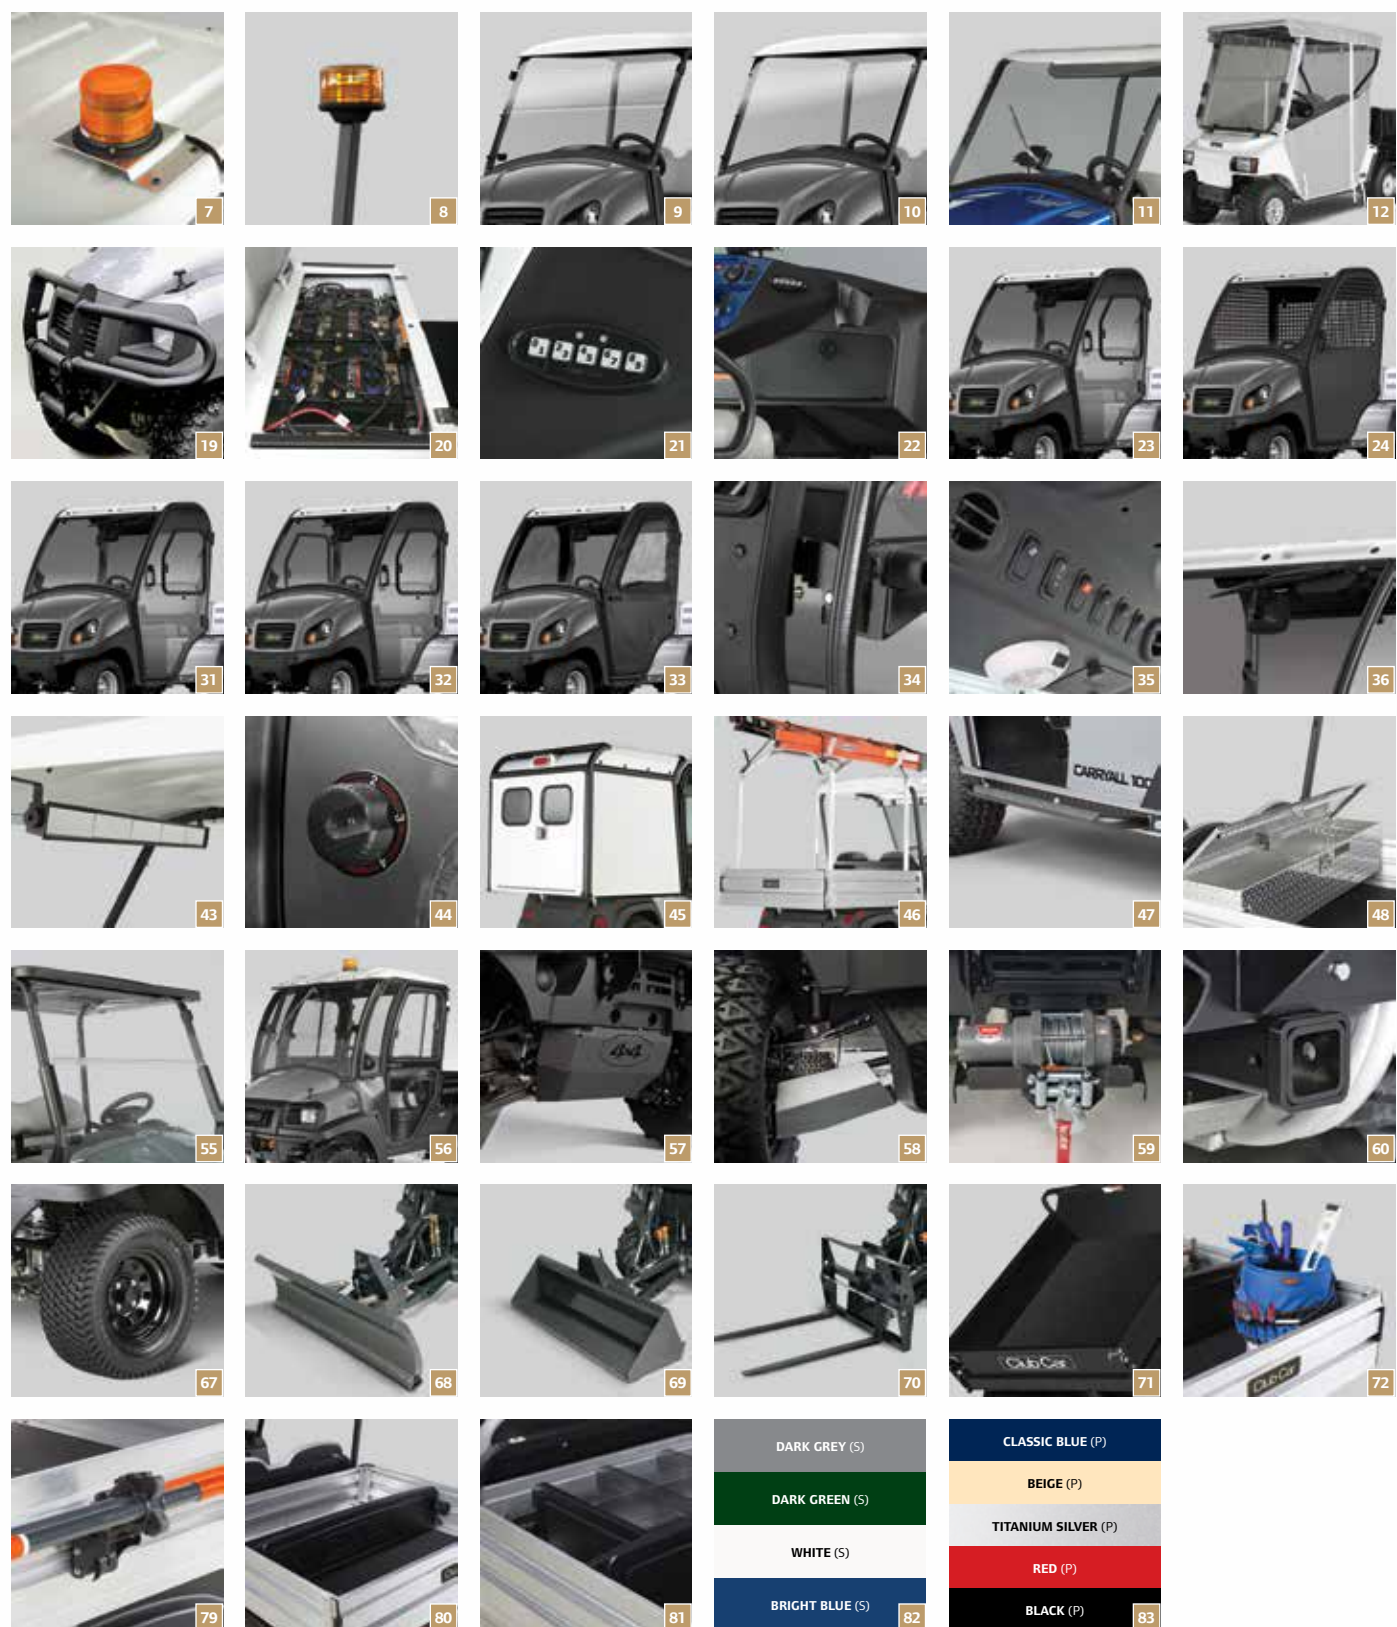

CHECK OUT THESE SPECIFICATIONS BEFORE YOU KICK THE TIRES.



	CARRYALL 100		CARRYALL 300	
	ELECTRIC	GASOLINE	ELECTRIC	GASOLINE
Motor/Engine ^[4]	48-volt DC	Subaru, 4-cycle	48-volt DC	Subaru, 4-cycle
Controller	250 Amp - Solid State		250 Amp - Solid State	
Displacement		404 cc		404 cc
Cylinders		Single		Single
Valving		Overhead Cam		Overhead Cam
Cooling		Air Cooled		Air Cooled
Horsepower (Rated)	3.3 hp (2.4 kW) rated, 13 hp (9.6 kW) peak	14.0 hp (10.3 kW) rated @ 3600 RPM per SAE J1940	3.3 hp (2.4 kW) rated, Peak 13 hp (9.6 kW)	14.0 hp (10.3 kW) rated @ 3600 RPM per SAE J1940
Max Torque	34.5 ft-lb (46.7 N-m) rated @ 1980 rpm	19.91 ft lb (27.0 N-m) rated @ 2400 RPM	34.5 ft-lb (46.7 N-m) rated @ 1980 rpm	19.91 ft lb (27.0 N-m) rated @ 2400 RPM
Lubrication		Splash lubrication		Splash lubrication
Governor		Ground Speed		Ground Speed
Transmission	Direct drive, double reduction helical gear	Continuously Variable Transmission (CVT)	Direct drive, double reduction helical gear	Continuously Variable Transmission (CVT)
Gear Selection	Forward/Neutral/Reverse		Forward/Neutral/Reverse	
Gear Ratio	12.32:1	11.47:1 forward;15.63:1 reverse	12.32:1	11.47:1 forward;15.63:1 reverse
Ignition		Capacitive Discharge		Capacitive Discharge
Battery	Six 8-volt Flooded Lead Acid	12V 500 CCA 105 min Reserve	Six 8-volt Flooded Lead Acid	12-volt 500 CCA 105 min Reserve
Charger	Automatic, computer-controlled 48-volt DC, 17 amp, UL/CUL listed		ERIC (650 W High Frequency)	
Headlights	Headlights standard		Two 37.5 Watt Halogen	
Fuel Delivery System		Electronic Fuel Injection (EFI)		Electronic Fuel Injection (EFI)
Fuel Capacity		5.5 Gallons (20.8 L)		5.5 Gallons (20.8 L)
Steering Mechanism	Self-adjusting Rack and Pinion		Self-adjusting Rack and Pinion	
Suspension (Front)	Independent leaf spring with dual hydraulic shocks		Independent leaf spring with dual hydraulic shocks	
Suspension (Rear)	Semi-independent leaf spring with dual hydraulic shocks		Semi-independent leaf spring with dual hydraulic shocks	
Brakes	Rear-wheel, self-adjusting mechanical drum		Rear Mechanical Drum	
Park Brake	Foot Operated, Multi-lock		Foot Operated, Multi-lock	
Body (Front & Finish)	ABS with automotive paint		ArmorFlex with automotive paint/clearcoat	
Body (Frame & Rear)	Aluminum / ArmorFlex®		Aluminum	
Tires (Front)	20 x 10-8, 4-ply rated, All-trail II		20 x 10-10, 6-ply	
Tires (Rear)	20 x 10-8, 4-ply rated, All-trail II		20 x 10-10, 6-ply	
Wheelbase	65 in (165.1 cm)		65.5 in (166.3 cm)	
Overall Height	48 in (121.9 cm)		47.1 in (119.6 cm)	
Overall Length	101 in (257 cm)		110.1 in (279.6 cm)	
Bed L x W x H (Cargo Box)	27.5 x 43.5 x 11 in (65.3 x 110.5 x 27.9 cm)		36.2 x 47.5 x 10.5 in (91.9 x 120.6 x 26.6 cm)	
Ground Clearance (Differential)	5.5 in (14 cm)		5.6 in (14.2 cm)	5.2 in (13.2 cm)
Track Width (Front)	34.5 in (88 cm)		36.6 in (92.9 cm)	
Track Width (Rear)	38.5 in (98 cm)		39.5 in (100.3 cm)	
Max Width (w/o Mirrors)	45 in (114.3 cm)		50.3 in (127.7cm)	
Outside Clearance Circle (Dia.)	220.4 in (559.8 cm)		230.5 in (585.4 cm)	
Curb Weight (with Batteries)	980 lb (444.5 kg)	863 lb (391.5 kg)	1105 lb (501.2 kg)	817 lb (370. 5 kg)
Vehicle Rated Capacity ^[5]	800 lb (363.2 kg)		800 lb (362.8 kg)	
Bed Load Capacity ^[5]	300 lb (136.1 kg)		300 lb (136.0 kg)	
Trailer Weight Rating ^[5]	300 (136.1 kg)		800 lb (362.8 kg)	
Combination Rated Capacity ^[5]	800 lb (363 kg)		800 lb (362.8 kg)	
Speed ^[6]	5-17 mph (8-27 km/h)	15-17 mph (24-27 km/h)	5-17 mph (8-27 km/h)	15-17 mph (24-27 km/h)
Warranty	4 yr limited battery warranty; 2-year limited consumer; 1-year limited commercial	3 yr/3000 hr limited powertrain; 2-year limited consumer; 1-year limited commercial	4 yr limited battery warranty 3 yr limited powertrain/frame 2 yr limited remaining vehicle	3 yr/3000 hr limited powertrain/frame 2 yr limited remaining vehicle

[4] Engine horsepower and torque specifications are provided by the engine manufacturer. Actual horsepower and torque in use may differ and are dependent on environmental conditions as well as maintenance condition of the engine.

[5] See owner's manual for vehicle loading data.

[6] Contact your dealer for electric vehicle speed setting options.



CARRYALL 500

ELECTRIC	GASOLINE
48-volt DC 500 Amp - Solid State	Subaru, 4-cycle
	404 cc Single Overhead Cam Air Cooled
3.7 hp (2.7kW) rated, Peak 20 hp (14.9 kW)	14.0 hp (10.3 kW) rated @ 3600 RPM per SAE J1940
71 ft-lb (96.2 N-m) rated @ 1450 RPM	19.91 ft lb (27.0 N-m) rated @ 2400 RPM
	Splash lubrication Ground Speed
Direct drive, double reduction helical gear	Continuously Variable Transmission (CVT)
Forward/Neutral/Reverse	
12.32:1	11.47:1 forward;15.63:1 reverse Capacitive Discharge
Eight 6-volt Flooded Lead Acid	12-volt 500 CCA 105 min Reserve
DeltaQ QuiQ (1 kW High Frequency)	
Two 37.5 Watt Halogen	
	Electronic Fuel Injection (EFI) 5.5 Gallons (20.8 L)
Self-adjusting Rack and Pinion Independent leaf spring with dual hydraulic shocks Semi-independent leaf spring with dual hydraulic shocks 4-wheel Mechanical Drum Foot Operated, Multi-lock ArmorFlex with automotive paint/clearcoat Aluminum 20 x 10-10, 6-ply 20 x 10-10, 6-ply 78.1 in (198.3 cm) 47.1 in (119.6 cm) 118 in (299.7cm) 44.2 x 47.5 x 10.5 in (112.2 x 120.6 x 26.6 cm)	
5.6 in (14.2 cm)	5.2 in (13.2 cm)
	36.6 in (92.9 cm) 39.5 in (100.3 cm) 50.3 in (127.7cm) 248.5 in (631.1 cm)
1393 lb (631.8 kg)	907 lb (411.4 kg)
	1200 lb (544.3 kg) 800 lb (362.8 kg) 1500 lb (680.3 kg) 1500 lb (680.3 kg)
5-17 mph (8-27 km/h)	15-17 mph (24-27 km/h)
4 yr limited battery warranty 3 yr limited powertrain/frame 2 yr limited remaining vehicle	3 yr/3000 hr limited powertrain/frame 2 yr limited remaining vehicle

CARRYALL 550

ELECTRIC	GASOLINE
48-volt DC 500 Amp - Solid State	Subaru, 4-cycle
	404 cc Single Overhead Cam Air Cooled
3.7 hp (2.7kW) rated,Peak 20 hp (14.9 kW)	14.0 hp (10.3 kW) rated @ 3600 RPM per SAE J1940
71 ft-lb (96.2 N-m) rated@ 1450 RPM	19.91 ft lb (27.0 N-m) rated @ 2400 RPM
	Splash lubrication Ground Speed
Direct drive, double reduction helical gear	Continuously Variable Transmission (CVT)
Forward/Neutral/Reverse	
12.32:1	11.47:1 forward;15.63:1 reverse Capacitive Discharge
Eight 6-volt Flooded Lead Acid	12-volt 500 CCA 105 min Reserve
DeltaQ QuiQ (1 kW High Frequency)	
Two 37.5 Watt Halogen	
	Electronic Fuel Injection (EFI) 5.5 Gallons (20.8 L)
Self-adjusting Rack and Pinion Independent leaf spring with dual hydraulic shocks Semi-independent leaf spring with dual hydraulic shocks 4-wheel Mechanical Drum Foot Operated, Multi-lock ArmorFlex with automotive paint/clearcoat Aluminum 22 x 10-10, 4-ply Turf tread or 22 x 10-10, 6-ply heavy-duty all-terrain 22 x 10-10, 4-ply Turf tread or 22 x 10-10, 6-ply heavy-duty all-terrain 78.1 in (198.3 cm) 51.2 in (130.0 cm) 118 in (299.7cm) 44.2 x 47.5 x 10.5 in (112.2 x 120.6 x 26.6 cm)	
	6 in (15.2 cm) 36.6 in (92.9 cm) 39.5 in (100.3 cm) 50.3 in (127.7cm) 268 in (680.7 cm)
1402 lb (635.9 kg)	942 (427.2 kg)
	900 lb (408.2 kg) 500 lb (226.7 kg) 900 lb (408.2 kg) 900 lb (408.2 kg)
5-17 mph (8-27 km/h)	15-17 mph (24-27 km/h)
4 yr limited battery warranty 3 yr limited powertrain/frame 2 yr limited remaining vehicle	3 yr/3000 hr limited powertrain/frame 2 yr limited remaining vehicle

CHECK OUT THESE SPECIFICATIONS BEFORE YOU KICK THE TIRES.



	CARRYALL 700		CARRYALL 700	
	ELECTRIC	GASOLINE	GASOLINE 4X2	GASOLINE 4X4
Motor/Engine ^[4]	48-volt DC	Subaru, 4-cycle	Kawasaki 4-cycle, industrial grade	
Controller	500 Amp - Solid State			
Displacement		404 cc	675 cc	
Cylinders		Single	Twin-cylinder	
Valving		Overhead Cam	OHV	
Cooling		Air Cooled	Air Cooled	
Horsepower (Rated)	3.7 hp (2.7kW) rated, Peak 20 hp (14.9 kW)	14.0 hp (10.3 kW) rated @ 3600 RPM per SAE J1940	20.1 hp (15.0 kW) rated @ 3400 RPM per SAE J1349	
Max Torque	71 ft-lb (96.2 N-m) rated @ 1450 RPM	19.91 ft lb (27.0 N-m) rated @ 2400 RPM	36.5 ft/lb (49.5 Nm)	
Lubrication		Splash lubrication	Full-pressure, spin-on oil filter	
Governor		Ground Speed	Automatic ground speed sensing	
Transmission	Direct drive, double reduction helical gear	Continuously Variable Transmission (CVT)	Wide ratio CVT; 3.7:1 low, 0.59:1 high	
Front/Rear Differential			Automatic locking rear differential	IntelliTrak™ Automatic 4-wheel Drive
Gear Selection	Forward/Neutral/Reverse		Forward/Neutral/Reverse	
Gear Ratio	12.32:1	11.47:1 forward;15.63:1 reverse	5.39:1 forward, 7.79:1 reverse, 3.3:1 differential	
Ignition		Capacitive Discharge	Transistorized magneto	
Battery	Eight 6-volt Flooded Lead Acid	12-volt 500 CCA 105 min Reserve	12-volt 500 CCA 105 min Reserve	
Charger	DeltaQ QuiQ (1 kW High Frequency)			
Headlights	Two 37.5 Watt Halogen		Two 55 Watt Halogen	
Fuel Delivery System		Electronic Fuel Injection (EFI)	Carburetor	
Fuel Capacity		5.5 Gallons (20.8 L)	6.5 gal (24.6 L)	
Steering Mechanism	Self-adjusting Rack and Pinion		Rack and pinion with Tilt Steering	
Suspension (Front)	Independent leaf spring with dual hydraulic shocks		Independent double A-arms with coil-over shocks	
Suspension (Rear)	Semi-independent leaf spring with dual hydraulic shocks		Semi-independent 4-link solid axle	
Brakes	4-wheel Mechanical Drum		Twin piston front, single piston rear hydraulic disk	
Park Brake	Foot Operated, Multi-lock		Mechanical Disk	
Body (Front & Finish)	ArmorFlex with automotive paint/clearcoat		GE Gelyo high-impact, scratch-resistant, injection molded color, Automotive finish	
Body (Frame and Rear)	Aluminum		Tubular aluminum	
Tires (Front)	20 x 10-10, 6-ply		4-ply Turf; 23 x 10.5 x 12	All-terrain, 25 x 10.5-12, 4-ply
Tires (Rear)	20 x 10-10, 6-ply		4-ply Turf; 24 x 10.5 x 12	All-terrain, 25 x 10.5-12, 4-ply
Wheelbase	99.1 in (251.7 cm)		88.7 in (225.3 cm)	
Overall Height	47.1 in (119.6 cm)		52.6 in (133.5 cm)	78.6 in (199.6 cm)
Overall Length	137.5 in (349.3 cm)		124.6 in (316.5 cm)	
Bed L x W x H (Cargo Box)	65.5 x 47.5 x 10.5 in (166.3 x 120.6 x 26.6cm)		48.8 x 49.8 x 10.9 in (124 x 126.5 x 27.7 cm)	
Ground Clearance (Differential)	5.6 in (14.2 cm)	5.2 in (13.2 cm)	7.3 in (18.5 cm)	8.2 in (20.8 cm)
Track Width (Front)	36.6 in (92.9 cm)		48.8 in. (124 cm)	
Track Width (Rear)	39.5 in (100.3 cm)		48.8 in. (124 cm)	
Max Width (w/o Mirrors)	50.3 in (127.7cm)		58.5 in. (148.5 cm)	
Outside Clearance Circle (Dia.)	340.5 in (864.9 cm)		316 in (802.6 cm)	
Curb Weight (with Batteries)	1475 lb (669 kg)	993 lb (450.4 kg)	1410 lb (639.57 kg)	1430 lb (648.6 kg)
Vehicle Rated Capacity ^[5]	1500 lb (680.3 kg)		1450 lb (658 kg)/1900 lb (862 kg)*	1200 lb (544 kg)/1450 lb (658 kg)**
Bed Load Capacity ^[5]	1000 lb (453.5 kg)		1050 lb (476.3 kg)/1500 lb (680.3 kg)*	800 lb (363.2 kg)/1050 lb (658 kg)**
Trailer Weight Rating ^[5]	1500 lb (680.3 kg)		2000 lb (907.2 kg)	
Combination Rated Capacity ^[5]	1500 lb (680.3 kg)		1450 lb (658 kg)/1900 lb (862 kg)*	2000 lb (907.2 kg)
Speed ^[6]	5-17 mph (8-27 km/h)	15-17 mph (24-27 km/h)	19 mph (30.6 km/h)	25 mph (40.2 km/h)
Warranty	4 yr limited battery warranty 3 yr limited powertrain/frame 2 yr limited remaining vehicle	3 yr/3000 hr limited powertrain/frame 2 yr limited remaining vehicle	2-year/2,000 hour limited	

*3/4-ton option; **High-capacity option



CARRYALL 1500		CARRYALL 1700	
DIESEL 4X4	DIESEL 4X4 WITH INTELLITACH	GASOLINE 4X4	DIESEL 4X4
Kubota D722, industrial grade		Kawasaki 4-cycle, industrial grade	
719 cc, Tier 4 3-cylinder OHV Liquid-cooled		675 cc Twin-cylinder OHV Air Cooled	
20.0 hp (15.0 kW) rated @ 3600 RPM per SAE J1995		20.1 hp (15.0 kW) rated @ 3400 RPM per SAE J1349	
33 ft/lb (45 Nm)		36.5 ft/lb (49.5 Nm)	
Full-pressure, spin-on oil filter Automatic ground speed sensing		Full-pressure, spin-on oil filter Automatic ground speed sensing	
Wide ratio CVT; 3.7:1 low, 0.59:1 high		Wide ratio CVT; 3.7:1 low, 0.59:1 high	
IntelliTrak™ Automatic 4-wheel Drive Forward/Neutral/Reverse 5.39:1 forward, 7.79:1 reverse, 3.3:1 differential Compression		IntelliTrak™ Automatic 4-wheel Drive Forward/Neutral/Reverse 5.39:1 forward, 7.79:1 reverse, 3.3:1 differential Transistorized magneto	
12-volt 500 CCA 105 min Reserve		12-volt 500 CCA 105 min Reserve	
Two 55 Watt Halogen Mechanical injection 6.5 gal (24.6 L)		Two 55 Watt Halogen Carburetor 6.5 gal (24.6 L)	
Rack and pinion with Tilt Steering Independent double A-arms with coil-over shocks Semi-independent 4-link solid axle Twin piston front, single piston rear hydraulic disk Mechanical Disk GE Geloy high-impact, scratch-resistant, injection molded color, Automotive finish		Rack and pinion with Tilt Steering Independent double A-arms with coil-over shocks Semi-independent 4-link solid axle Twin piston front, single piston rear hydraulic disk, Mechanical Disk GE Geloy high-impact, scratch-resistant, injection molded color, Automotive finish	
Tubular aluminum All-terrain, 25 x 10.5-12, 4-ply All-terrain, 25 x 10.5-12, 4-ply 88.7 in (225.3 cm) 78.6 in (199.6 cm)		Tubular aluminum All-terrain, 25 x 10.5-12, 4-ply All-terrain, 25 x 10.5-12, 4-ply 114 in (225.3 cm) 78.6 in (199.6 cm) 157.6 in (400.3 cm)	
124.6 in (316.5 cm)		48.8 x 49.8 x 10.9 in (124 x 126.5 x 27.7 cm)	
48.8 x 49.8 x 10.9 in (124 x 126.5 x 27.7 cm)		48.8 x 49.8 x 10.9 in (124 x 126.5 x 27.7 cm)	
8.2 in (20.8 cm)		8.2 in (20.8 cm)	
48.8 in. (124 cm)		48.8 in. (124 cm)	
48.8 in. (124 cm)		48.8 in. (124 cm)	
58.5 in. (148.5 cm)		58.5 in. (148.5 cm)	
316 in (802.6 cm)		428 in (1087.1 cm)	
1550 lb (703.1 kg)		1630 lb (739.36 kg)	
1200 lb (544 kg)/1450 lb (658 kg)**		1600 lb (725.8 kg)	
800 lb (363.2 kg)/1050 lb (658 kg)**		800 lb (363.2 kg)	
2000 lb (907.2 kg)		1800 lb (816.5 kg)	
2000 lb (907.2 kg)		1800 lb (907.2 kg)	
25 mph (40.2 km/h)		25 mph (40.2 km/h)	
2-year/2,000 hour limited		2-year/2,000 hour limited	



Ingersoll Rand (NYSE:IR) advances the quality of life by creating comfortable, sustainable and efficient environments. Our people and our family of brands—including Club Car®, Ingersoll Rand®, Thermo King® and Trane®—work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; and increase industrial productivity and efficiency. We are a global business committed to a world of sustainable progress and enduring results.



Club Car, LLC
PO Box 204658
Augusta, GA 30917
USA

1.800.ClubCar
info@clubcar.com

Club Car
Ingersoll Rand
Alma Court Building
Lenneke Marelaan,6
BE-1932 Sint-Stevens-Woluwe
Belgium

+32 2 746 1200
info.eu@clubcar.com

ingersollrand.com

©2015 Club Car LLC. Club Car believes the information and specifications in this piece of literature were correct at the time of printing. Specifications, standard features, options, fabrics and colors are subject to change without notice. Some features may be unavailable when your vehicle is built. Some vehicles are pictured with options that may be available at extra cost or may not be available on some models. Ask your dealer about the availability of options and verify that the vehicle you ordered includes the equipment you ordered. There are no warranties, expressed or implied, contained herein. See the Limited Warranty in the owner's manual or write to: Club Car, PO Box 204658, Augusta, GA 30917. The company reserves the right to make design changes without obligation to make these changes on previously sold units or systems.

CCN 18040049 Rev 08/16